



Detail A




**304# Stainless steel
embedded parts**

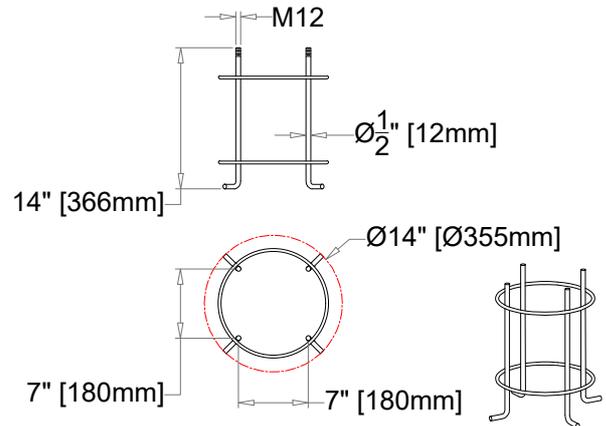


REFERENCE IMAGE




3D VIEW

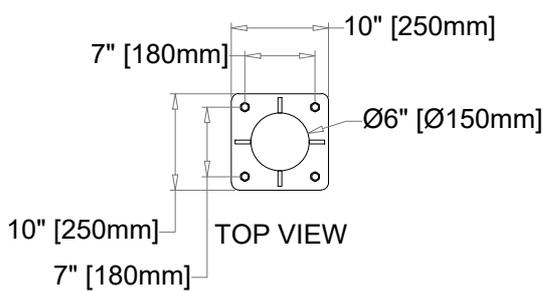



| | | | | | | | |
|--------------------|------------------|-------------|----|------|------------------|------------------------|--------|
| Drawing Title : | | | | | | | |
| Project : | | | | | | | |
| Scale: 1:20.0 (A4) | Area / Location: | | | | | | |
| Date : 10.10.2024 | Drawn By : | | | | | | |
| Checked By : | Approved by: | | | | | | |
| Rev. | Date | Description | By | QTY: | Est. Weight : KG | First Angle Projection | 1 of 1 |

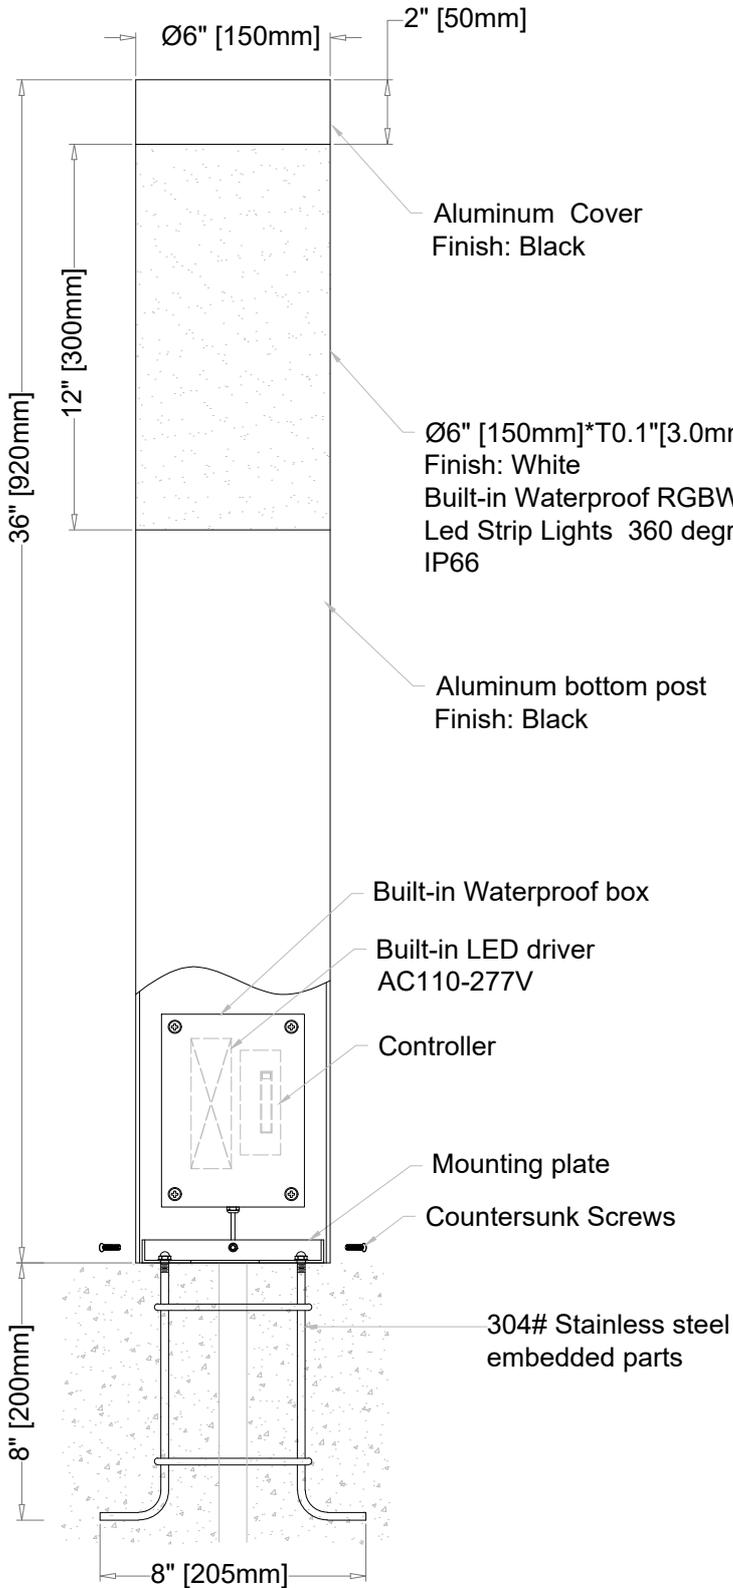


FRONT VIEW

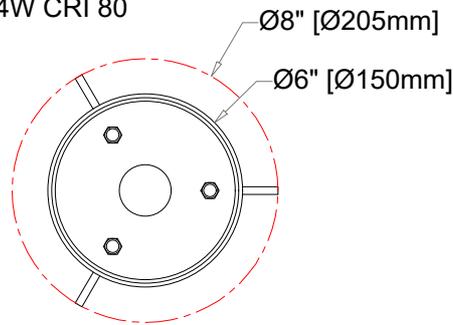

TOP VIEW

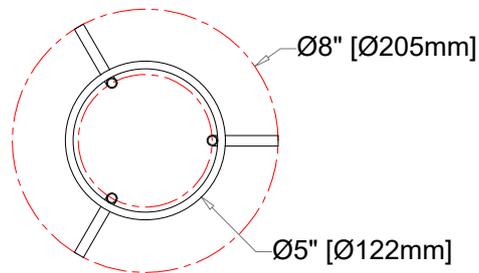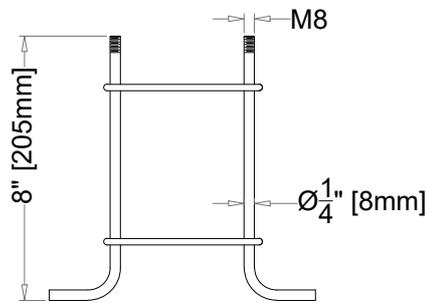

304# Stainless steel
embedded parts

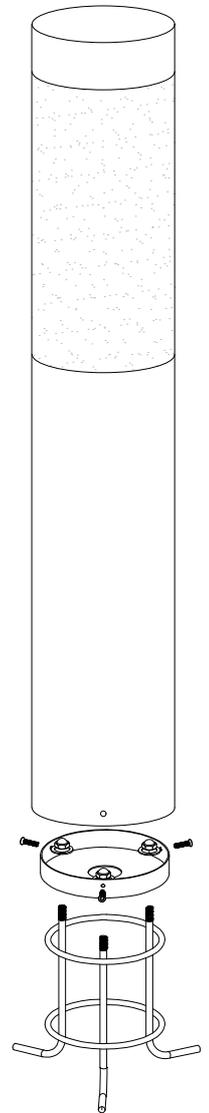

3D VIEW



REFERENCE IMAGE

Drawing Title :

Project :

Scale: 1:6.0 (A4)

Area / Location:

Date : 10.10.2024

Drawn By :

R1

Checked By :

Approved By :

Rev.

Date

Description

By

QTY:

Est. Weight :

KG

First Angle Projection



1 of 1





bollard



wall-mounted



cartridge

BODY:

Electrified extruded aluminium cartridge with 130mm diameter and methacrylate outer protective screen. Extruded aluminium poles of various heights.

LIGHT SOURCES:

WW (Warm White, 3000K) 16W COB LED. Metal halide lamps (35W), compact fluorescent lamps (18W, 22W, 26W and 46W), A55 halogen lamp.

POWER SUPPLY:

Electromagnetic control gear for the metal halide version, electromagnetic or electronic control gear for models mounting fluorescent lamps and integrated electronic control gear for the LED version.

ACCESSORIES:



Micro-perforated screen or glass diffuser, mounting bracket, poles with 600mm, 1000mm and 2000mm height. → see accessories




IP65




IK06



Emission with lamp LED and FL - direct



Emission with lamp MH - direct



Emission with lamp MH - direct/indirect



LED COB



AL A55



FL TC-EL



FL TC-D



FL TC-L



FL TC-TE



FL T8



MH



120°



240°



Roto-symmetrical

The 120°/140° emissions are obtained by use of screen accessories (Cartridge 240 / 435)



Totem bollard*

| Light source | Wattage | mm (L) | kg | Code |
|--------------|---------|--------|------|--------------|
| LED | 16W | 600 | 7,40 | 76427. __ WW |
| | | 1000 | 9,00 | 76428. __ WW |




110-277 V / 50-60Hz

Integrated electronic control gear

WW (Warm White): CRI >80 / lm 1990 / K 3000

*Luminaire inclusive of head and pole
Methacrylate outer protection

600mm(23,62")/
1000mm(39,37")

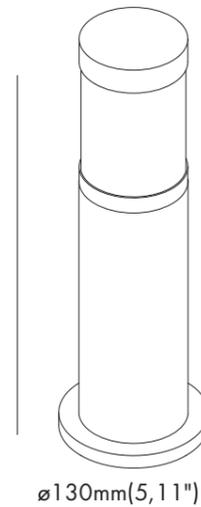

ø130mm(5,11")


Totem bollard*

| Light source | Wattage | Fitting | kg | Code |
|--------------|---------|---------|------|-----------|
| AL A55 | 46W | E26 | 4,50 | 76598. __ |
| FL TC-EL | 22W | | | 76598. __ |

Constant mains voltage operation

*Luminaire inclusive of head and pole
Methacrylate outer protection

360mm(14,17")



ø130mm(5,11")

Totem wall-mounted

| Light source | Wattage | Fitting | kg | Code |
|--------------|---------|---------|------|-----------|
| FL TC-D | 26W | G24d-3 | 6,50 | 76596. __ |


110-277V / 50Hz

Integrated electromagnetic control gear

| | | | | |
|----------|-----|---------|------|-----------|
| FL TC-TE | 42W | GX24q-4 | 5,90 | 76597. __ |
|----------|-----|---------|------|-----------|

110-277V / 50-60Hz Integrated
electronic control gear

540mm(21,25")

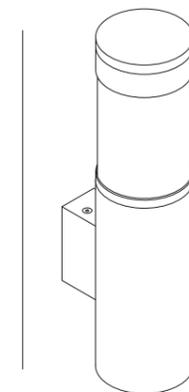

ø130mm(5,11")

Colour identification to be added to the code



68
Grey



79
Corten
finish




86
Anthracite
grey




Totem cartridge 240

| Light source | Wattage | Fitting | kg | Code |
|--|---------|---------|------|-----------|
| ALA55 | 46W | E26 | 5,0 | 76591._._ |
| FLTC-EL | 22W | | | 76591._._ |
| Constant mains voltage operation | | | | |
| FLTC-L | 18W | 2G11 | 4,70 | 76593._._ |
| FLTC-D | 26W | G24d-3 | 5,10 | 76592._._ |
| 110-277V / 50Hz Integrated electromagnetic control gear | | | | |
| FLTC-TE | 42W | GX24q-4 | 4,20 | 76594._._ |
| 110-277V / 50-60Hz Integrated electronic control gear | | | | |

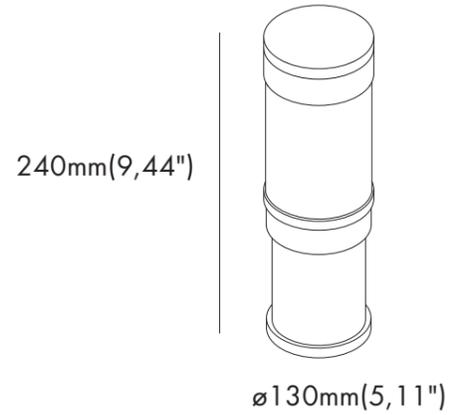

Totem cartridge 435


| Light source | Wattage | Fitting | Code |
|--|---------|---------|-----------|
| FLTC-L | 36W | 2G11 | 76595._._ |
| 110-277V / 50Hz Integrated electromagnetic control gear | | | |

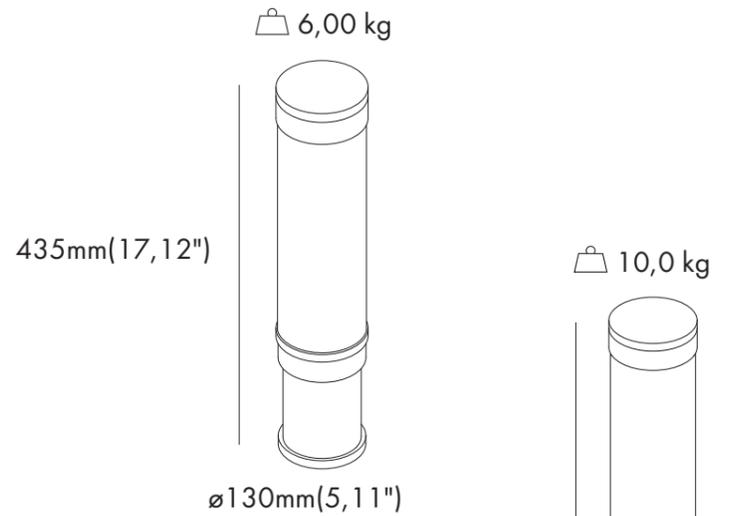

Totem cartridge 1550

| Light source | Wattage | Fitting | Code |
|--|---------|---------|-----------|
| FLT8 | 58W | G13 | 76373._._ |
| 110-277V / 50Hz Integrated electromagnetic control gear | | | |

1550mm(61,02")

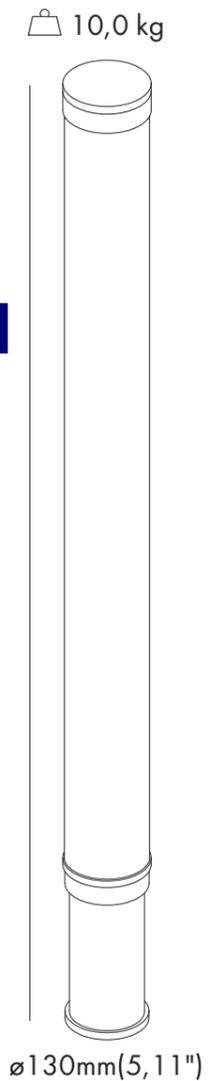

Colour identification to be added to the code



68
Grey



79
Corten
finish



86
Anthracite
grey



Totem cartridge MH 175


| Light source | Wattage | Fitting | Code | Code |
|--------------|---------|---------|-----------|-----------|
| MH | 35W | G12 | 76368._ _ | 76370._ _ |

110-277V / 50Hz
Integrated electromagnetic control gear

Totem cartridge MH 850

| Light source | Wattage | Fitting | Code |
|--------------|---------|---------|-----------|
| MH | 35W | G12 | 76369._ _ |

110-277V / 50Hz
Integrated electromagnetic control gear
Modular luminaire Methacrylate outer protection.

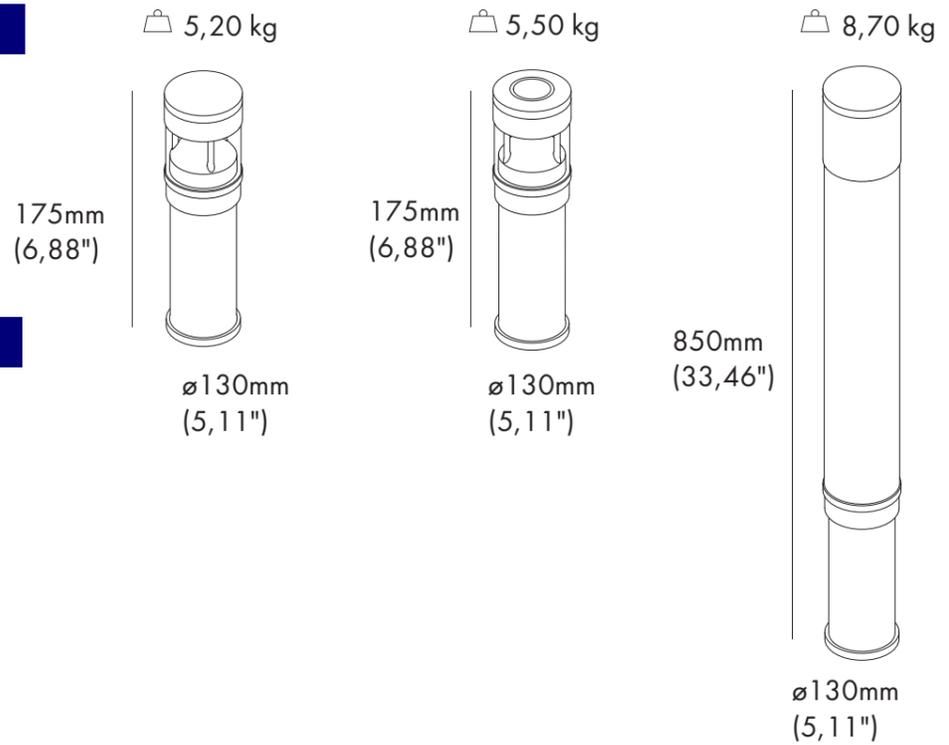


Colour identification to be added to the code


| | | | | | |
|--|------------|--|---------------------|--|-----------------------|
| | 68 Grey | | 79 Corten finish | | 86 Anthracite grey |
|--|------------|--|---------------------|--|-----------------------|

Ordering guidelines Totem cartridge


- Cartridge 240 / 435 / 1550
- Cartridge MH 175 / 850



Pole H600
code 76375._ _
Pole H1000
code 76376._ _

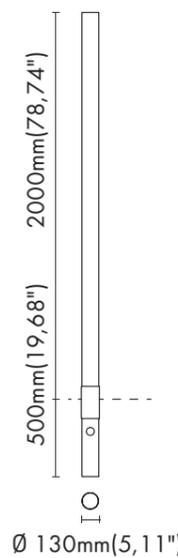

Pole H2000
(above-ground)
code 76377._ _

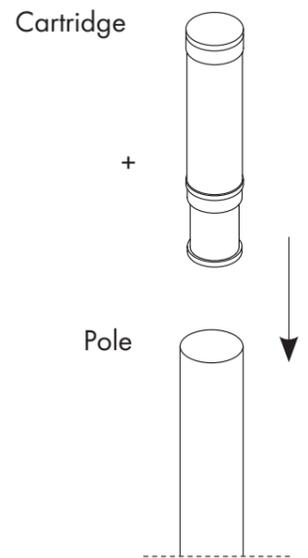

ACCESSORIES

- Bollard Mounting plate with anchor bolts code 76380.00
- Cartridge 240 for products with source AL / FL Micro-perforated screen with white polycarbonate (3-piece kit) code 76381.00 Glass diffuser code 76384.00
- Cartridge 435 for products with source AL / FL Micro-perforated screen with white polycarbonate (3-piece kit) code 76382.00 Glass diffuser code 76385.00
- Cartridge 1550 for products with source AL / FL Micro-perforated screen code 76383.00

